
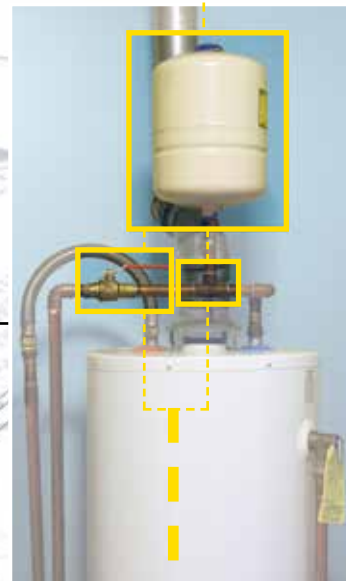


Another **PUSH SOLUTION** from  
Elkhart Products and Apollo Valves...

# APOLLOPUSH™

**NEW!**

## Combination Water Heater Isolation Valve & Thermal Expansion Relief Device

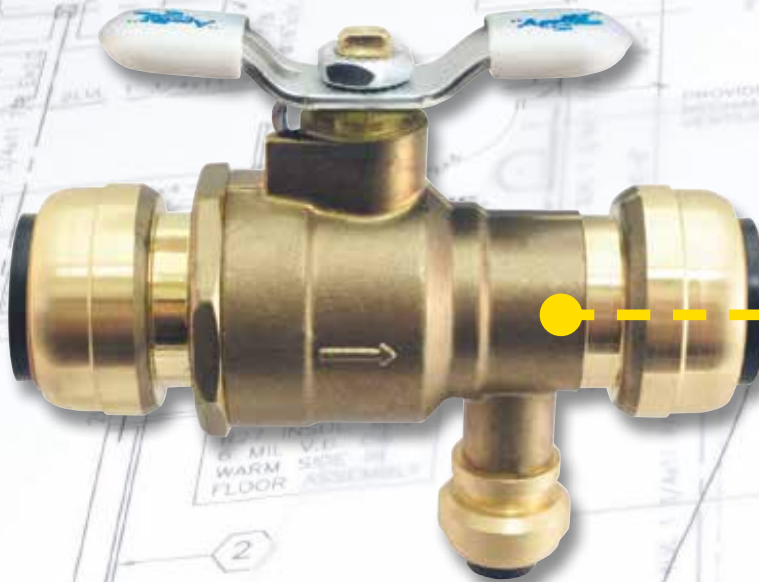

*Replace the  
expansion tank,  
dielectric union,  
shutoff valve,  
and tee with  
one device!*



### Saves time, installation space, and money!

The Lead Free<sup>1</sup> ApolloPush™ 78LF-RV Series Combination Water Heater Isolation Valve/IAPMO approved Thermal Expansion Relief Device solves two Code requirements.

Proven TECTITE™ push-fit technology provides fast and simple “push to connect” installation. The 78LF-RV is the ideal alternative to expansion tanks in residential plumbing systems. Made in the USA, featuring Lead Free<sup>1</sup> dezincification resistant brass materials.

### Features & Benefits

- Push to install
- Removable\*
- Made in the USA
- 50 Year Connection Warranty
- One-of-a-kind push-type valve
- No special installation tools required
- Relief valve set and sealed - 125 psi standard, optional 80 & 100 psi settings
- Save time and money
- Lead Free<sup>1</sup>
- 5 Year Valve Warranty
- Use with Copper, CPVC, PEX



Elkhart Products  
Corporation



[www.apollovalves.com](http://www.apollovalves.com)

# APOLLOPUSH™

## Applications

Install on the incoming cold water line to the residential water heater. This device replaces the expansion tank, dielectric union, tee, and shutoff valve on the cold water line feeding the water heater.

Further details available at [www.apollovalves.com](http://www.apollovalves.com).

## Product Specifications

3/4" PUSH x 3/4" PUSH x 1/4" PUSH connections

Ball valve maximum supply pressure: 200 psi

Relief valve factory set and sealed: 125 psi standard

Maximum temperature: 210°F

IAPMO IGC 128-2008 and NSF approved

Heavy-duty plated steel handle

Lead free<sup>1</sup> brass body

Made in the USA



<sup>1</sup>LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

Part Number	Description
78LF-808RV	125 psi preset (Standard)
78LF-818RV	100 psi preset (Optional)
78LF-828RV	80 psi preset (Optional)
10165621 / D553700	1/4" Demount Clip*
10165625 / D518800	3/4" Demount Clip*

\*Demount clips are required for removal.



## Combination Water Heater Isolation Valve & Thermal Expansion Relief Device



### FAST & SIMPLE

Easy push-fit installation.  
No special tools.



### HEAT FREE

Reduces fire hazard.  
Utilizes push-fit technology.



### CLEAN

No glues, fluxes, or solder  
needed.



### CONVENIENT

Compatible with CPVC,  
Copper, and PEX pipe.

For more information visit our website

[www.apollovalves.com](http://www.apollovalves.com)



701 Matthews Mint Hill Road  
Matthews, NC 28105

Elkhart Products  
Corporation



1255 Oak Street, Elkhart, IN 46514

Customer Service (704) 841.6000

FOR WEB ONLY 3/2015

